
Overview


The HP SN6000 Stackable 8Gb Fibre Channel switch simplifies SAN deployment in SMB to Enterprise environments with an affordable and easy to manage SAN solution, while delivering scaling efficiency that keeps up with fibre channel port growth as the network expands. Built with low-cost, high-performance scalability in mind, each SN6000 features up to 20 FC device ports enabled supporting 8/4/2 Gbps speeds, plus 4 dedicated high-speed 10/20 Gbps stacking ports for linking/stacking SN6000 switches. Heterogeneous fabric connection is simplified too with Transparent Router (TR) functionality, standard in H-series switches (SN6000 and 8/20q), by providing seamless, non-disruptive interoperability and access to servers and storage on HP B-series and HP C-series SANs. The economical H-series SAN solution includes Simple SAN Connection Manager (SSCM) software for complete end-to-end fabric management. With SSCM software it's easy to provision storage as well as manage HBAs and switches from a single screen that offers a comprehensive topology view of the SAN.. SSCM software simplicity does not end with H-series switches. The software integrates with HP Virtual Connect Enterprise Manager (VCEM) environments by providing an end-to-end integrated solution to manage HP Bladesystem c-class via, HP Virtual Connect Enterprise Manager (VCEM), and P2000 MSA storage array/EVA storage with SN6000 switches via one management interface.

No other 8Gb FC switch, available in the industry, offers the scaling efficiencies as the SN6000 stackable fibre channel switch. IT Storage growth is escalating, while demand for more SAN access is increasing. Adding more usable FC ports in the data center is full of challenges, but with the SN6000 switch it's as simple as stacking SN6000 switches. Begin with 20 device ports for an affordable solution and add new stacking switches and save more money for up to 120 usable device ports per stack (single manageable unit), or >500 ports in multi-stack topologies. To achieve higher performance 10 Gbps stacking ports may be upgraded to 20 Gbps speed at any time, non-disruptively, extending the solution lifespan while preserving current investments. Best of all no matter how large a stacking SAN becomes; it's managed as one logical end-to-end fabric with plenty of availability features to prevent downtime.



HP SN6000 Stackable Fibre Channel Switch

Scaling efficiencies: SN6000 easily accommodates IT budgets with dual stacks, multiple stacks or large enterprise multi-stack deployments



Dedicated 10 Gbps/20 Gbps stacking ports give IT managers all the headroom they need to deploy new applications and technologies with confidence. Need more ports? Simply add another switch to the stack for easy non-disruptive expansion to 120 ports and up to five 120 device port stacks supporting greater than 500 device ports. Need more bandwidth? Simply apply the 20 Gbps Stacking (ISL) port upgrade for growth and performance.



Overview

Key Features and Benefits

- Build a scalable SAN with less hardware and less complexity
 - O The SN6000 single-power supply model can be ordered with 8 8 Gbps device ports enabled (BK780A) or 20 8 Gbps device ports enabled (AW575A)
 - Enable additional ports, on the BK780A, in 4-port increments with a license, for a maximum of 20 FC device ports per switch
 - O The SN6000 dual-power supply model (AW576A) can be ordered with 20 8 Gbps device ports enabled
 - O Four (4) 10 Gbps/20 Gbps Stacking (ISL)Ports
 - O 120 ports per stack, more in a multi-stack SAN configuration (>500 FC ports)
 - O Hot-swappable dual power supply/FAN model, non-disruptive code load high-availability stacking configurations (AW576A)
 - O Fewer cables and less switches to manage compared to non-stacking switches
- Affordable High Performance
 - O Industry leading ASIC technology: < 200ns latency
 - O 20 Gbps ISL stacking port upgrade option
 - O Adaptive Trunking included with no added charges- Optimal and affordable ISL performance
 - O 544 Gbps aggregate bandwidth per switch
 - O Low-cost HP standard SFP/SFP+ optics (4 Gbps/8 Gbps)
- Gain operationally efficiencies with unique SAN management software
 - O Integrated end-to-end fabric management-server to storage
 - O Integration with HP Virtual Connect Enterprise Manager (VCEM) for end-to-end management of HP BladeSystem c-Class to HP EVA or MSA arrays, switches and HBA in one easy to use interface.
 - O Microsoft Exchange wizard eliminates user error
 - O Drag-and-drop zoning
 - O Adaptive Trunking
 - o Includes IO StreamGuard
 - O Enterprise Fabric Management Suite software (EFMS) for managing and monitoring larger SANs (optional)
 - O Integration with HP Virtual Connect Enterprise Manager (VCEM) for end-to-end management of HP BladeSystem c-Class to HP EVA or MSA arrays, switches and HBA in one easy to use interface.
- Interoperability
 - O Transparent Router functionality- Seamless operation: HP B and C-series SANs
 - O SN6000 and 8/20q via device port -> ISL



Models

HP SN6000 Fibre
Channel Switch

HP SN6000 Stackable 8Gb 24-port Single Power Fibre Channel Switch ¹	AW575A*
HP SN6000 Stackable 8 Gb 24-port Dual Power Fibre Channel Switch	AW576A*
HP SN6000 Stackable 8 Gb 12-port Single Power Fibre Channel Switch ¹	BK780A*
*#0D1 may appear after this part number on your sales order when factory integration is indicated.	
¹ The AW575A and BK780A single power supply model is not field upgradeable to a dual power supply model.	



Product Highlights

Configuration and interoperability support	The HP SN6000 Fibre Channel Switch will interoperate with other H-series switches, HP SN6000 and HP 8/20q Fibre Channel Switches, running the firmware version defined in the SAN Design Guide: http://www.hp.com/go/sandesignguide					
	The HP SN6000 Fibre Channel Switch will also interoperate with HP B-series and C-series fabrics using Transparent Router (TR) technology. For details and supported firmware versions, refer to the SAN Design Guide: http://www.hp.com/go/sandesignguide					
High-availability features	 Hot-swappable power supply and fan module (Dual power supply model) Hot-swappable 8 Gbps SFP+ and 4 Gbps SFP optical transceivers Non-Disruptive Code Load and Activation (NDCLA) Non-Disruptive 20 Gbps ISL Upgrade License Activation I/O StreamGuard Configure switches in redundant stacking configurations 					
Security features	 User Security User Accounts RADIUS Authentication Connection security SSH (CLI) SSL (EFS and SMI-S) Device security FC-SP DH-CHAP FC-GS-6 CT Authentication 					
Easy manageability	 Simple SAN Connection Manager (SSCM) Enterprise Fabric Management Suite (Optional) QuickTools with stack management enabled Command Line Interface SMI-S v1.1 provider GS-4 Management Server (including FDMI) SNMP FTP FTP TFTP RADIUS 					
H-series solutions	 The following HP products combine to provide a unique, comprehensive end-to-end solution that is powerfully simple to manage. HP BladeSystem c-Class chassis HP Virtual Connect Fibre Channel module for the HP BladeSystem c-Class enclosure HP Virtual Connect Enterprise Manager (VCEM) HP Simple SAN Connection Manager (SSCM) HP Enterprise Virtual Array (EVA), Command View EVA and/or Modular Storage Array (MSA) HP FC HBAs for the HP BladesySystem c-Class Enclosure HP H-series Fibre Channel switches (SN6000 and 8/20q) 					



Product Highlights	
Scaling efficiency	 All topologies supported: cascade, ring, and mesh Available models 8 device ports enabled + 4 stacking (ISL) ports (single-power supply model - BK780A) Expand BK780A model to 20 ports in 4 port increments with a license 20 device ports enabled + 4 stacking (ISL) ports: single-power supply model (AW575A) and dual-power supply model (AW576A) Supports stacks of two to six switches linked via 10 Gbps or 20 Gbps high-speed stacking ports Supports up to a 30 switch fabric and over 500 device ports 7 Hops Adaptive Trunking, intelligent ISL path selection The HP SN6000 Fibre Channel Switch scales to the maximum limits defined in the SAN Design Guide: http://www.hp.com/go/sandesignguide
Cabinet Support	• 22U, 36U, and 42U; 5000, 9000 and 10,000 series Cabinets
Disk Array Support**	 HP P2000 G3 MSA HP MSA2000fc and MSA2000fc G2 HP MSA1000 and MSA1500 (active/active failover only) HP P6000/EVA (P6300, P6500; EVA4400, EVA6400, EVA8400; EVA4100, EVA6100, EVA8100; EVA4000, EVA6000, EVA8000) HP P9500, XP10000, XP20000, XP12000, XP24000 HP 3PAR F-Class, T-Class Simple SAN Connection Manager software only supports configuration, management and/or provisioning of EVA and P2000/MSA.
Operating System Support*	 Refer to Spock (http://spock.corp.hp.com/index.aspx) for the most recent interoperability support matrix Microsoft Windows Server 2008 Microsoft Windows Server 2003 Microsoft Windows Storage Server 2003 VMware 4.0 Red Hat Enterprise Linux (RHEL) SUSE Linux Enterprise Server (SLES) HP-UX Citrix Xen Enterprise Integrated Citrix XenServer HP Enterprise Apple OS 10.6x, 10.5x, 10.4x (10.4.7 minimum)
	For specific support details, see the SAN Design Guide: http://www.hp.com/go/sandesignguide
	*Refer to Spock (http://spock.corp.hp.com/index.aspx) for the most recent interoperability support matrix



Product Highlights

Enterprise Backup Support	 MSL6000 with LTO4 drives
(EBS)	 MSL2024, MSL4048, and MSL8096 with LTO4 drives
	 EML-e Series with LTO4 drives
	 HP 6000 Virtual Library System
	HP 9000 Virtual Library System
	 HP 12000 Virtual Library System EVA Gateway

Software Components

HP Simple SAN Connection Manager (included with H-series) Powerful and comprehensive end-to-end SAN infrastructure lifecycle management software that includes configuration, management, and maintenance for HP BladeSystem c-Class enclosure, HP switches, HBAs, and HP MSA/EVA storage in a single management interface.

Features include:

- Integration with HP Virtual Connect Enterprise Manager (VCEM)/HP BladeSystem c-Class
- Topology views (sever, switch, HBA and storage)
- EVA and MSA storage configuration and provisioning
- Drill-down device management
- Switch configuration
- HBA and storage drag-and-drop zoning administration
- Application-based MSA/EVA setup and provisioning wizard for Microsoft Exchange deployments and template for custom applications
- Microsoft volume management
- Automatic switch/HBA software/firmware update notifications and downloads for convenient upgrades
- Automatic EVA/MSA firmware notifications
- HBA failover configuration
- Event logs for switch & HBAs
- Change tracking
- Easy to follow software documentation

Simple SAN Connection Manager is supported on a management station running Microsoft Windows Server 2008, Microsoft Windows Server 2003 R2 SP2 or Microsoft Windows Storage Server 2003 R2 SP2.

System requirements:

- 512 MB memory
- 200 MB disk space
- 2.0 GHz processor
- CD ROM drive, Ethernet port
- JAVA Runtime Environment (JRE)
- Internet browser: Microsoft Internet Explorer, Netscape Navigator, or Mozilla Firefox

SSCM software upgrades are available at URL: http://www11.itrc.hp.com/service/sum/home.do

QuickToolsOn-board graphical user interface allows administrators to access advanced switch management(included)functionality using the switch's IP address.



Product Highlights

Optional Software

HP Enterprise Fabric

HP Enterprise Fabric Management Suite (EFMS) software is a set of simple, affordable and powerful Management Suite (EFMS) fabric management tools for HP H-series fabrics. A management interface provides performance and fabric monitoring as well as configuration tools for H-series fabrics. Users are licensed, per site, geographic location, or campus, to manage an unlimited number of switches and fabrics from a single, fully integrated application.

> Enterprise Fabric Management Suite also provides maintenance, isolation and troubleshooting capabilities for SAN administrators who require advanced tools. Included with EFMS is a comprehensive set of real-time diagnostic tools for monitoring and troubleshooting Fibre Channel Fabrics. Determine if a device is responding, trace the path in the fabric, as well as monitor the health of SFP and XPAK transceivers.

Reference URL: www.hp.com/go/EFMS

EFMS features include:

- Performance Monitoring provides easy-to-configure/easy-to-use graphs for monitoring the performance of your Fibre Channel SAN. Troubleshoot fabric problems and indentify performance bottlenecks before they become an issue. Historical performance data can be exported to spreadsheets or databases for analysis.
- Extended Credit Wizard steps the user through a simple and easy to use interface, allowing the user to quickly configure ports to support situations when long distance communication is required.
- Fabric Tracker allows the user to view two saved configurations and compare the differences. Periodically take a snap-shot of the fabric configuration to see what has changed from yesterday, a week ago, a month ago, or from the day of installation.
- Fabric Monitoring enables the user to configure thresholds and alarms per switch port to alert operations when unexpected error rates, traffic levels, or anomalies occur in the fabric. Enterprise Fabric Management Suite can be configured to send alerts, through SNMP for full integration into existing enterprise monitoring applications.
- Auto Filtering takes the time and labor out of finding useful switch and port statistics- health, operation, and environmental statistics are a mouse click away. Filter switch data using buttons that group data into logical sets. Quickly find critical switch information such as power, cooling, health and the associated IP network status.
- Fabric Zoning provides simple drag and drop zoning with fast and easy activation. Unmatched flexibility with support of multiple zoning types: Port WWN Zoning, Node WWN Zoning, FCID Zoning, Hard Zoning, Soft Zoning.
- Device Management is a mouse click away through the topology view. Configure IP network properties, upgrade firmware, view and modify switch properties easily. Setup and configuration of devices in the fabric is made simple and fast.
- Configuration and Zoning Wizards makes a switch that is already easy to configure and zone even easier. Prompts guide the user through screens to guickly configure and zone a switch.
- Switch and Fabric Event Monitoring along with Alerting provide the user with views of monitored events and alerts that can also be configured and sent to management applications through SNMP.
- mPort Technology provides users with the flexibility to decide which licensed ports are enabled (SN6000 or 8/20q with less than 20 enabled device ports). De-activate one to four of the highspeed stacking ports of the SN6000 and enable the equivalent number of device ports. The administrator decides which ports are enabled based on their fabric needs.
- Robust On-Line Help features provide step by step instructions through an embedded Help



Product Highlights

function.

- Fibre Channel Fabric Ping is an essential tool for troubleshooting fabric problems. FC Ping verifies that a functional path exists between two ports and provides round trip information. Administrators can determine which ports and devices are responding allowing the administrator to quickly identify issues.
- Fibre Channel Trace Route provides insight about the fabric and assists with troubleshooting congestion. FC Trace Route traces the route through the Fibre Channel network and displays path information between a source and destination device in order to determine the path of communication between the two devices. Knowing this aids the administrator in making decisions about fabric performance and problem resolution. FC Ping used in conjunction with FC Trace Route gives the administrator a powerful tool to pinpoint fabric connectivity problems and diagnose performance issues.
- **Digital Diagnostics Monitoring** provides SFP and XPAK transceiver data and health status that SAN administrators depend on. Increase uptime of the SAN by proactively monitoring the vitals of transceivers. Set policies and trigger alarms based on power, temperature, voltage and current of the transceiver. Predict potential failures or isolate existing problems in the fabric with this simple, yet powerful, tool.



Service and Support, HP Care Pack, and Warranty Information

Warranty (1-1-1) Hardward

(1-1-1) Hardware Warranty - One-year on-site warranty, normal business hours, next business day response, installation not included.

Software Warranty - HP warrants only that the software media will be free of physical defects for a period of ninety (90) days from delivery.

NOTE: During the warranty period HP will provide standard business hours, standard business days telephone support for firmware and embedded non-saleable software.

HP Care Pack Services For increased uptime, productivity and ROI -HP Care Pack packaged services for Storage

These days, you need to get the most out of your storage investment-you can't afford not to. When you buy HP storage products and solutions, it's also a good time to think about what levels of service and support you may need. To help take the worry out of deploying, designing, maintaining, and managing your environment, we've designed a portfolio of service options that are as: flexible, reliable and scalable as your storage. Unlike storage-only vendors, we take a holistic approach to your entire environment, bridging storage, servers, blades, software and network infrastructures with our HP Care Pack packaged services for Storage.

Protect your business beyond the warranty

When it comes to robustness and reliability, standard warranties on today's computing equipment have matured just as the technologies have matured. Good news on some fronts-but also a source of potential problems and subsequent consequences that come from depending on standard warranties alone. Standard warranty protects against product defects and some causes of downtime- but not the business. By using a standard approach to warranty uplifts, such as HP Care Pack Services, you can reduce downtime risks and be more certain of operational consistency for both mission-critical and standard business computing. Simply put, HP Care Pack Services normalize the warranty of combined products - helping you proactively guard against unplanned downtime.

Extending warranties with HP Care Pack Services

For cost-effective upgrading or extending your standard warranty, HP Care Pack Services offer a suite of standard reactive hardware and software support services that are sold separately, or combined as with our Support Plus and Support Plus 24 services. The portfolio also provides a combination of proactive and reactive services, such as Proactive 24 Service and Critical Service. In addition, with HP Proactive Select we offer an innovative approach to service delivery that gives you the flexibility to acquire the specific proactive services you need today, then add services as your needs evolve. HP Proactive Select offers a broad set of technical or per-event type service options - including server, storage, and network, SAN device, and software, environment, installation and education services. Services that you can mix and match depending on your specific requirements, from preliminary planning and equipment delivery to installation, configuration, integration, and testing, through every level of ongoing support. Our HP Care Pack packaged services for Storage assures help when you need it most. And for many products, post-warranty HP Care Pack Services are available when your original warranty has expired.

HP Storage Services: Offering reliability, flexibility and value-just like your storage

HP Storage Services offers a full spectrum of customer care, from technology support to complex migrations to complete completely managed services. HP Factory Express provides customization, integration and deployment services for turnkey solutions. HP Education offers flexible, comprehensive training on storage networking, disk storage systems, and storage software to help your IT staff get the most out of your investments. And HP Financial solutions extend innovative financing and asset management programs to cost-effective buy, manage and eventually retire your older equipment.



Service and Support, HP Care Pack, and Warranty Information

HP Storage Services, the trusted business technology experts who manage your technology in action, because when technology works, business works. http://www.hp.com/hps/storage

NOTE: Care Pack Services availability may vary by product and country.

HP Care Pack Services are sold by HP and HP Authorized Service Partners:

- Services for customers purchasing from HP or an enterprise reseller are quoted using HP order configuration tools.
- Customers purchasing from a commercial reseller can find HP Care Pack Services at http://www.hp.com/go/lookuptool

Recommended Support	HP Care Pack Services recommended for optimal satisfaction of all deployments of your product.					
	3-Year HP Support Plus 24	For a higher return on your storage investment, HP Support Plus 24 provides integrated hardware and software support services designed specifically for your technology. Available 24x7, this 3-year combined reactive support option delivers onsite hardware support and over-the-phone software support around-the-clock. Leverage the full strength of HP Technology Services - customers can trust the services professionals at HP to work collaboratively with them, putting our strategic and technical know-how to work across their entire infrastructure.				
		 Improve uptime with responsive hardware and software services Enjoy consistent service coverage across geographically dispersed sites Update HP software at a predictable cost Increase customer satisfaction-with no interoperability gaps 				
Recommended Deployment	HP Enhanced Implementation Service for SANs	http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6638EN.pdf For customers who are building a new SAN or expanding their existing one, we offer the HP Enhanced Implementation Service for SANs. This provides complete design and implementation services for Fibre Channel, FCOE, FCIP, SAS and iSCSI SAN connectivity components. Covering all major SAN connectivity technologies including virtual as well as physical hosts, no competitor offers a more complete end to end SAN design and implementation service, ensuring comprehensive optimal SAN connectivity tailored to your specific environment.				
		 Ensures optimal SAN connectivity tailored to your specific environment. Allows your IT resources to stay focused on their core tasks and priorities Reduces implementation time, impact and risk to your storage environment Helps ensure a successful implementation for complex deployments by providing HP project management 				
		http://h20195.www2.hp.com/v2/GetPDF.aspx/5981-8527EN.pdf				

Related Services

Services that will enhance the user experience in many product deployments.

3-Year HP Proactive 24 HP Proactive 24 Service for SANs is an integrated hardware and software

24 HP Proactive 24 Service for SANs is an integrated hardware and software support service that combines proactive problem prevention with responsive

Service and Support, HP Care Pack, and Warranty Information

As an alternative to our recommended support level, for customers who want improved SAN availability and access to a wide range of proactive and reactive services:

24x7 assistance for rapid problem resolution.

A collaborative relationship with HP Services strengthens your IT team and gives you direct access to our technical expertise as issues arise.

Improve IT staff skills, increase SAN productivity.

Proactive 24 Service for SANs can help you:

- Enhance the skills and efficiency of your IT staff through knowledge transfer, shared best practices in storage management, and hands-on assistance
- Improve SAN availability through access to a wide range of proactive and reactive services
- Boost productivity through effective change management, configuration assistance, and performance optimization
- Increase the return on your SAN investment
- Enhance your overall operational effectiveness

Expert single-point-of-contact assistance 24x7

An assigned HP Services account manager is your primary contact for proactive services and access to HP's diverse technical resources. Your account manager works closely with your IT staff to understand your goals, document the components of your infrastructure, recommend changes to improve performance and stability, and monitor ongoing operations through HP's industry-leading remote monitoring and support tools.

http://h20219.www2.hp.com/services/cache/11157-0-0-225-121.html

SANs

improving availability of their SAN and decreasing potential for unplanned downtime:

HP Assessment Service for The HP Assessment Service for SANs offers customized technical and operational guidance to customers employing HP storage subsystems and the interconnecting storage area network (SAN) infrastructure. In a typical For customers interested in engagement, HP or one of our authorized business partners will perform a detailed discovery using HP's proprietary toolset to gain an understanding of the configuration of your storage devices and SAN topology. The findings from this process will be compared to HP best practices and industry standards as defined by IT Service Management (ITSM) disciplines. The results of the evaluation will be quickly and efficiently processed into information you can leverage. This information, in the form of a comprehensive HP SAN Assessment report, will be summarized by HP or one of our authorized business partners with recommendations that are intended to improve availability levels and ongoing management of your storage and SAN environment.

http://h20195.www2.hp.com/v2/GetPDF.aspx/5981-9510EN.pdf

HP Proactive Select Service

Proactive Select - increased flexibility, minimal complexity -- Select what works for you - your package

For customers who need to Delivery planning + Proactive Service Credits

- improve IT performance and manageability through the use of cost effective
- Credits are used to redeem proactive services
- Three 'predefined' service credit levels - 30, 60,180 credits



Service and Suppo	rt, HP Care Pack, and War	ranty Information			
		 Additional credits available Available in 1,3, 4 & 5 year packages Reactive Utilize existing reactive services products - ranging from Next Day, through 24x7, to 6 Hour Call to Repair 			
	http	p://h20195.www2.hp.com/v2/GetPDF.aspx/4AA2-3842ENN.pdf			
eSupport	HP eSupport is a portfolio of te environment - from the desktop	chnology-based services that assist you with managing your business to the data center.			
	Support Portal The HP support portal provides manage the daily operations of	one-stop access to the information, tools and services you need to Your IT environment.			
	Features include:				
	 Efficient logging and trac 	business and IT professionals d drivers s			
	Access to certain features of the support portal requires an HP service agreement.				
	To access the support portal, vi	sit: http://www.hp.com/support			
Customer Technical Training	storage solution. HP offers a vo disk storage systems. Our class	pral part of your strategy to get the best return on investment for your HP priety of training courses on storage software, networking, archiving and es are available in many delivery modalities from traditional instructor-led age age			
HP Services Awards	industry organizations and pub team's dedications, technical ex satisfaction. For a list of all our	cognized for service and support excellence by customers, partners, lications around the world. Recent honors and award reflect our services copertise, professionalism and uncompromising commitment to customer awards, please visit: services/cache/433028-0-0-225-121.htm			
Additional Services Information	For more information about HF http://www.hp.com/hps/storag	P Care Pack Services for Storage, please visit: e			
		contact your local HP representative. Contact information for a be found at "Contact HP" http://www.hp.com			



H-series Family Information

HP H-series 8Gb Fibre Channel Switches	8/20q 8 port active Fibre Channel Switch AQ233A	8/20q 16 port active Fibre Channel Switch AK242A	8Gb Simple SAN Connection Kit AK241A	SN6000 Stackable 8Gb 12-port Fibre Channel Switch BK780A	SN6000 Stackable 8Gb 24-port Single Power Fibre Channel Switch AW575A	SN6000 Stackable 8Gb 24-port Dual Power Fibre Channel Switch AW576A
Targeted Environment	Workgroups, Departments	Workgroups, Departments	Workgroups, Departments	Workgroups, Departments	Workgroups, Departments Data Centers	Workgroups, Departments, Data Centers
Physical FC Ports per switch	8 device ports enabled 20 device ports Max	16 device ports enabled 20 device ports Max	8 device ports enabled 20 device ports Max	8 device ports plus 4 ISL stacking ports enabled, maximum of 20 device ports	20 device ports plus 4 ISL stacking ports enabled, maximum of 20 device ports	20 device ports plus 4 ISL stacking ports enabled, maximum of 20 device ports
Fibre Channel Stacking switch	No	No	No	Yes, 120 FC device ports enabled per stack, up to a 30 switch fabric, 500+ device ports in multi- stack configs.	Yes, 120 FC device ports enabled per stack, up to a 30 switch fabric, 500+ device ports in multi- stack configs.	Yes, 120 FC device ports enabled per stack, up to a 30 switch fabric, 500+ device ports in multi- stack configs.
Fibre Channel Port Bandwidth	8Gbit/sec	8Gbit/sec	8Gbit/sec	8Gbit/sec	8Gbit/sec	8Gbit/sec
Hot plug, redundant power supplies/ FANs	No, single power/Fan	No, single power/Fan	No, single power/Fan	No, single power/Fan	No, single power/Fan	Yes, dual power/Fan
Ethernet	N/A	N/A	N/A	N/A	N/A	N/A
Aggregate bandwidth	340 Gbps Max.	340 Gbps Max.	340 Gbps Max.	544 Gbps Max.	544 Gbps Max.	544 Gbps Max.
OS Support		http://www	NOTE: Plea hp.com/go/sande/	se Refer to SAN Design or http://www	•	lesignguide
Storage system support	failover only);	G3 MSA; HP MSA2000fc and MSA2000fc G2; HP MSA1000 and MSA1500 (active/active y); HP P6000/EVA (P6300, P6500; EVA4400, EVA6400, EVA8400; EVA4100, EVA6100, (4000, EVA6000, EVA8000); HP P9500, XP10000, XP20000, XP12000, XP24000; HP 3PAR F-Class, T-Class.				
Dedicated InterSwitch Link (ISL) ports for stacking	N/A	N/A	N/A	4 ISL 10Gbs standard upgradable to 20Gbs	4 ISL 10Gbs standard upgradable to 20Gbs	4 ISL 10Gbs standard upgradable to 20Gbs
Adaptive Trunking	Included	Included	Included	Included	Included	Included
I/O StreamGuard	Included	Included	Included	Included	Included	Included
Drag-and-drop zoning	Included with SSCM	Included with SSCM	Included with SSCM	Included with SSCM	Included with SSCM	Included with SSCM



H-series Family Information

Transparent Router (TR)	Included	Included	Included	Included	Included	Included
Simple SAN Connection Manager Enterprise Software	Included	Included	Included	Included	Included	Included
Enterprise Fabric Mgmt. Suite Software	Optional	Optional	Optional	Optional	Optional	Optional
Form factor	1U	10	1U	1U	1U	10



Configuration Information

Step 1 - Base Configuration

Select one:		•	
Model Nan	ne	Model Description	Part Number
HP SN600(8Gb 24-pc Fibre Chan	rt Single Power	24 ports, single power supply Fibre Channel Switch with 20 - 8Gbps FC device ports enabled and 4-10 Gbps stacking (ISL) ports enabled, Simple SAN Connection Manager software, country-specific power cord, serial cable, licenses, rack mount kit, and docs. NOTE: Requires optical transceivers listed below.	AW575A
HP SN6000 8Gb 24-pc Fibre Chan	rt Dual Power	24 ports, dual hot-swappable power supply Fibre Channel Switch with 20 -8Gbps FC device ports enabled and 4-10 Gbps stacking (ISL) ports enabled Simple SAN Connection Manager software, country-specific power cord, serial cable, licenses, rack mount kit, and docs. NOTE: Requires optical transceivers listed below.	AW576A
HP SN6000 8Gb 12-pc Fibre Chan	rt Single Power	24 ports, single power supply Fibre Channel Switch with 8 - 8Gbps FC device ports enabled, upgradeable to 20 device ports enabled, and 4-10 Gbps stacking (ISL) ports enabled, Simple SAN Connection Manager software, country-specific power cord, serial cable, licenses, rack mount kit, and docs. NOTE: Requires optical transceivers listed below.	BK780A

Step 2 - Additional Options

Stacking (ISL) Upgrades	HP SN6000 Stackable 20Gb ISL Upgrade LTU (paper)	TA822A
	HP SN6000 Stackable 20Gb ISL Upgrade E-LTU (electronic)	TA822AAE
Device Port Upgrades	HP SN6000 Stackable 8Gb 4-port FC Switch Upgrade LTU (paper)	TA821A
	HP SN6000 Stackable 8Gb 4-port FC Switch Upgrade E-LTU (electronic)	TA821AAE
8 Gbps Optical	HP 8 Gbps Short Wave FC SFP+	AJ718A
Transceivers (SFP+)	HP 8 Gbps LW 10km FC SFP+ 1 Pk Transceiver	AW584A
4 Gbps Optical Transceivers (SFP)	HP 4 Gbps Short Wave FC SFP	A7446B
Optical cables	HP PremierFlex OM4 Fibre Optic cables	
	1 m PremierFlex OM4 LC/LC Multi-Mode Optical Cable	QK732A
	2m PremierFlex OM4 LC/LC Multi-Mode Optical Cable	QK733A
	5m PremierFlex OM4 LC/LC Multi-Mode Optical Cable	QK734A
	15m PremierFlex OM4 LC/LC Multi-Mode Optical Cable	QK735A
	30m PremierFlex OM4 LC/LC Multi-Mode Optical Cable	QK736A
	50m PremierFlex OM4 LC/LC Multi-Mode Optical Cable	QK737A
	10m PremierFlex OM4 MPO/MPO 8 fiber Multi-Mode Optical Cable	QK729A
	50m PremierFlex OM4 MPO/MPO 8 fiber Multi-Mode Optical Cable	QK731A
	50m PremierFlex OM4 MPO/MPO 8 fiber Multi-Mode Optical Cable HP PremierFlex OM3+ cables	QK731A



Configuration Information

	1 m Premier Flex LC/LC Optical Cable	BK838A
	2m Premier Flex LC/LC Optical Cable	BK839A
	5m Premier Flex LC/LC Optical Cable	BK840A
	15m Premier Flex LC/LC Optical Cable	BK841A
	30m Premier Flex LC/LC Optical Cable	BK842A
	50m Premier Flex LC/LC Optical Cable	BK843A
	HP PremierFlex OM3 cables	
	.5 m LC-LC Multi-Mode OM3 Fibre Channel Cable	AJ833A
	1 m LC-LC Multi-Mode OM3 Fibre Channel Cable	AJ834A
	2 m LC-LC Multi-Mode OM3 Fibre Channel Cable	AJ835A
	5 m LC-LC Multi-Mode OM3 Fibre Channel Cable	AJ836A
	15 m LC-LC Multi-Mode OM3 Fibre Channel Cable	AJ837A
	30 m LC-LC Multi-Mode OM3 Fibre Channel Cable	AJ838A
	50 m LC-LC Multi-Mode OM3 Fibre Channel Cable	AJ839A
Stacking Cables	XPAK Cables*	
Ū	HP 3in 10/20 Gbps XPAK Copper Cable	AW581A
	HP 9in 10/20 Gbps XPAK Copper Cable	AW582A
	HP 2m 10/20 Gbps XPAK Copper Cable	AW583A
	XPAK Optics	
	HP 10 Gbps SW FC optical XPAK 1 Pack Transceiver	AW573A
	These optics are used for stacking ports when distances greater than 2m are required. OM4 or OM3 Fibre Channel cables are used with these optics.	
	* XPAK copper cables used with the factory shipped transceiver/connectors are required to interconnect SN6000 switches through the 10 Gbps/20 Gbps Stacking	
	Ports (ISLs). These are available in 3 in, 9 in, or 2m (78 in) lengths.	


Minimum # of cables and recommended lengths:

Qty SN6000	2	3	4	5	6
Qty(s) - Cable Length	2 - 3"	2 - 3", 1 - 9"	3 - 3", 3 - 9"	4 - 3", 6 - 9"	2 - 3", 6 - 9"

Customers requiring longer distances to connect SN6000s through the Stacking Ports need to order XPAK optical transceivers and standard OM4 or OM3 FC cables.



Configuration Information

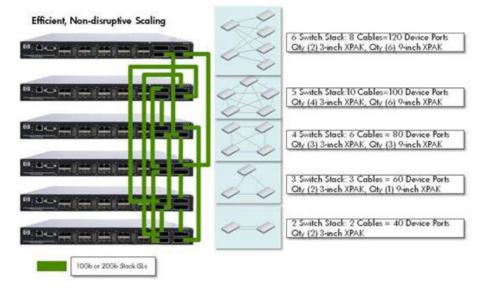

Example of a high availability cable configuration in a single logic FC SAN supporting up to 120 FC device ports

Optional Software	HP H-series Enterprise Fabric Management (EFMS) Suite LTU paper	TC321A
	H-series Enterprise Fabric Management Suite (EMFS) E-LTU electronic	TC321AAE



Technical Specifications

Fibre Channel Standards And Revisions	Line Services (FC-LS) Framing & Signaling (FC- Generic Services (FC-GS- Switch Fabric (FC-SW-5), Arbitrated Loop-2 Rev. 7.0 Fibre Channel Device Atto	6) except for enhanced zoning D (FC-AL-2) ach (FC-DA) gies for Interconnects (FC-MI-2) C-Tape) pre Mapping (FC-VI) fication (RFC 2837)	
Fibre Channel ports	Up to 20 universal FC device ports enabled 4 stacking (ISL) ports enabled (10 Gbps Fibre Channel, upgradeable to 20 Gbps)		
Scalability	Full fabric architecture: http://www.hp.com/go/SANDesignGuide		
Certified maximum	Refer to SAN Design Guide: http://www.hp.com/go/SANDesignGuide		
Interoperability	HP B-series fabric ¹ HP C-series fabric ¹	8Gb Fibre Channel Switch a base for supported B-series and C-series switches:	
Performance	8 Gbps line speed, full duplex 10 Gbps and 20 Gbps stacking (ISL) port line speed, full duplex		
Switch core	Non-blocking		
Form Factor	10		
Fabric latency	$<0.2\mu$ sec., cut-through routing		
Maximum frame size	2148 bytes (2112 byte payload)		
Classes of service	Class 2, Class 3, Class F (inter-switch frames) connectionless Fibre Channel protocol support		
Port types	8 Gbps: FL_Port, F_Port, and E_Port; G_Port, GL_port (auto-configuring), Transparent Router (TR) 10/20 Gbps: E Port and F Port; G Port (auto-configuring)		
Data traffic types	Fabric switches support unicast and broadcast		
Media types	8 Gbps Small Form-Factor Pluggable Plus (SFP+) optical transceivers		
Laser	Distance using short-wave 8 Gbps optical transceivers at 2 Gbps, 4 Gbps, and 8 Gbps connection speed:		
	8 Gbps:	OM4 fiber: 190m OM3 fiber: 150 m OM2 fiber: 50 m	
	4 Gbps:	OM2 fiber: 50 m OM4 fiber: 400m	
	τ Ops.	OM3 fiber: 270 m	
		OM2 fiber: 150 m	



Technical Specifications

· · · · · · · · · · · · · · · · · ·						
	2 Gbps:	OM3 fiber: 500 m				
		OM2 fiber: 300 m				
	Distance using short-wave 4 Gbps optical transceivers at 2 Gbps and 4 Gbps connection speed:					
	4 Gbps:	OM3 fiber: 270 m				
		OM2 fiber: 150 m				
	2 Gbps:	OM3 fiber: 500 m				
		OM2 fiber: 300 m				
Fabric services	Simple name server Hardware based zoning					
	Registered State Change Notification (RSCN) I/O StreamGuard™					
		Multi-chassis in-order delivery				
	Automatic path selection FDMI support					
Options	8 Gbps SFP+ and 4 Gbps SFP optical transceivers, 20 Gbps ISL upgrade license, device port upgrade license (4-port increments), Enterprise Fabric Management Suite software					
Supported software	Simple SAN Connection Manager, QuickTools, Enterprise Fabric Management Suite software (optional)					
Management access	10/100 Ethernet Base T (RJ-45), serial port (RS-232 with DB9), in-band (Fibre Channel)					
Diagnostics	Power-on self test POST					
Front-to-back airflow	RoHS compliant					
Dimensions	Width	17 in (43.2 cm)				
	Height	1.7 in (4.32 cm)				
	Depth	18.75 in (47.6 cm)				
	Weight	Dual Power Supply: 18 lb (8.16 kg) Single Power Supply: 15 lb (6.8 kg)				
Environment	Temperature	Operating	41° to 104° F (5° to 40° C)			
		Non-operating	4° to 158° F (20° to 70° C)			
	Humidity	Operating	10% to 90% non-condensing			
		Non-operating	10% to 95% , non condensing			
	Altitude	Operating	0 to 10,000 ft.			
		Non-Operating	0 to 50,000 ft.			
	Shock	Operating	4 G, 11 ms, 20 repetitions			
		Non-Operating	30 G, 13 ms, trapezoidal			
	Vibration	Operating	5-500 Hz, random, 0.2 G			
		Non-operating	2-200 Hz, random, 0.5 G			
Power consumption	Supported power range	Operational	100 to 240 VAC			
	Frequency	50 to 60 Hz				
	Heat output	Dual Power: 80 watts nominal; 90 watts typical maximum				
		Single Power: 73 watt	s nominal; 83 watts typical maximum			
Emissions	FCC subpart B section 15 - Class A (United States) ICES-003, Issue 4:2004 - Class A (Canada) AS/NZS CISPR22 - Class A (Australia/New Zealand) VCCI V-3/2006.04 - Class A (Japan) CISPR/EN 55022:1998 + A1:2000 and A2:2003 - Class A (EU)					



Technical Specifications

Safety

EN 61000-3-2: 2000 + A2: 2005 EN 61000-3-3: 1995 + A1: 2001 KN22 with RRL notice No. 2005-85 - Class A (Korea) US: UL Listed, UL 60950-1 CANADA, CSA C22.2 No. 60950-1 - cUL Listed Europe: EN60950-1 CB Scheme-IEC 60950-1 European Union CE German GS Mark through UL/DEMKO DEMKO VCCI-A Russia: GOST R

Additional information: http://www.hp.com/go/sn6000

© Copyright 2011 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

